

19° Fixed Soft Spotlight



RG-P001

USER MANUAL

Please read this instructions carefully before use
Rige lighting & Audio Equipment co.,Ltd

Please read these instruction carefully before use. Strictly observes its instruction to avoid danger caused by wrong operation. 19° Fixed Soft Spotlight are suit for theatre, reporting hall, performance prop, etc. The correct operating ensures the best effect.

一、 Schematic illustration:

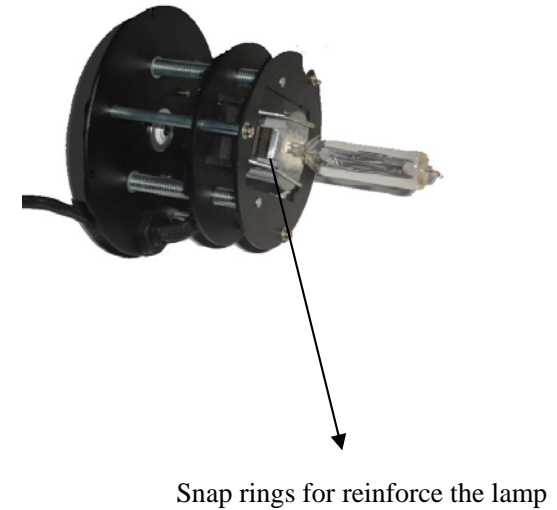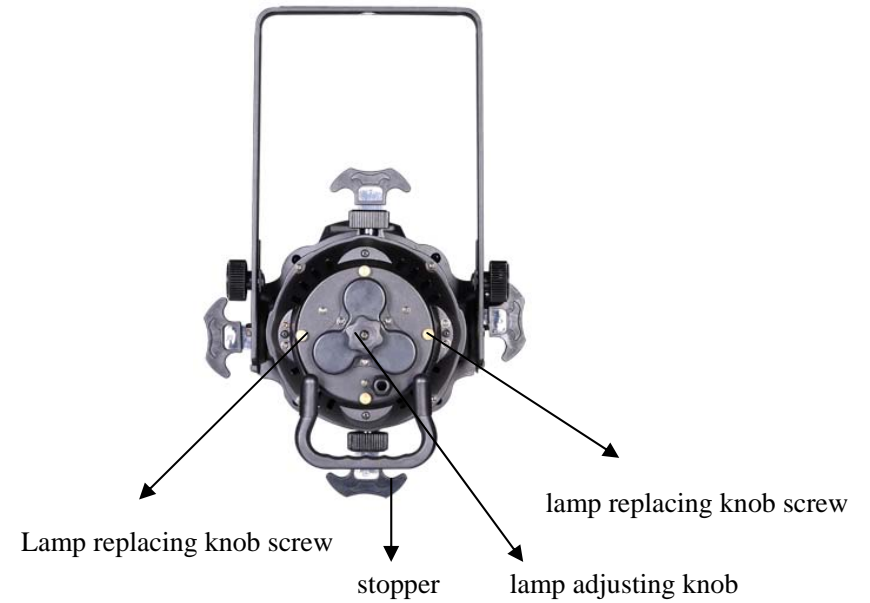

二、operate intruduction:

- 1、 Check the product before use,make sure there is no damagement or screw lost during shipment.
- 2、 Turn off the power supply,then open the back cover.Do not touch partial glass of the lamp directly while inserting.220V HPL 750W/575W is available for this lighting.
- 3、 Please dim the brightness slowly to avoid lamp damagement.
- 4、 Install the lighting in an air circulate environment under 45℃.
- 5、 The temperature is about 200℃ at the back of lighting,do not touch it directly.the distance must be more than 1 meter.
- 6、 Please pay attention to moistureproof protection.
- 7、 It's normal that backing paint of the lighting produce a little smog or burnt smell at the first using.
- 8、 Reinforce the protection net in using.
- 9、 Using the equipment,the power supply must be connected to the earth line to ensure the safety.
- 10、 When the lighting is open,please do not fierce vibrate it.

三、 Lighting adjustment:

- 1、 When the lighting is open,use the adjusting knob and the slipper to got the perfect beam effect.open the knob block,to make adjustment by using adjusting knob or the slipper.
- 2、 To adjust the lamp's position in the reflector,tru the Forward Backword Adjusting Knob.Turn it clockwise,the socket moves forward;turn it anticlockwise,the socket moves backward.Unlock the ring in the desired direction.
- 3、 NOTE: a: do not turn it strenuously when the adjusting knob couldn't turn around.

b: do not turn it strenuously when the lamp adjusting knob couldn't turn around.

c: use the adjusting knob and the lamp adjusting knob to get the best beam effect.

四、 Inserting(replacing)the lamp:

- 1、 Turn off the power supply,make sure the lamp have been cool before replacing.open the two knob screw,then pull out the back cover
- 2、 Open the snap rings,put out the damaged lamp,then insert the new one.Make sure the lamp is inserted complete,reinforce lamp and block the snap rings.
- 3、 Adjust the back cover to the best position,then reinforce two knob screw.
- 4、 Turn the Forward Backward Adjusting knob to get best beam effect.
- 5、 Warning: a: please replace it while the reflector or the lens have been damaged or they are even lose the funtion.

b:please replace the lamp while the lamp have been damaged.